

Split

High output LED task light for large work areas

LUXO



Split is a powerful task light for large, demanding work places. It has twice the light output of our traditional task lights making it particularly suitable for large workspaces where plenty of light is needed.

With its graceful shape and all-metal construction, this impressive task light will stand out in any office environment. It has a spring-balanced arm in the Luxo tradition, for maximum reach and flexibility.

Distinctive design

Split has a distinctive design and great functionality. The lamp head is made of a slim sheet of aluminum which has been cut and shaped so that the LED light sources are directed at an angle toward the desk top. This contributes to Split's excellent asymmetric light distribution.

Colors: Black, silver grey or white.

2 x 6 Watt LED

Split is equipped with two custom-made 6 Watt LED modules, which provide a broad, directional light across the workspace. The two LED modules are positioned at a 30° angle. This provides for a particularly wide light distribution. With two LED modules, the light covers a large area, while the lamp head stays parallel with the surface – providing asymmetric and ergonomically correct workstation lighting.

The LED modules have a life expectancy of 50,000+ hours. This means 25 years or more of normal office use. Split is dimmable, and equipped with automatic shut-off in order to save energy. A built-in timer automatically turns the light off after 4 or 9 hours.

Available with integrated motion sensor

An integrated motion sensor version is also available. The sensor turns the light on when motion is detected. The sensor also turns the light off after 15 minutes of inactivity.

The importance of the personal task light

Follow this link to learn more about the importance of good workstation lighting, and how a task light can help you achieve a better working environment.

- [Follow this link to learn more about Luxo workspace lighting](#)

Split



TECHNICAL DESCRIPTION

LIGHTSOURCE

Supplied with 2 x 6W integrated LED modules (13.6W total energy consumed). Correlated color temperature (CCT) is 3000°K. Color rendering index (CRI) is 90.

BODY MATERIAL AND COLOR

Steel arm and aluminum shade. Colors: black, silver grey or white.

MOUNTING

Standard with edge clamp or table/desk base.

OPTICS

Asymmetric light output. White, polycarbonate reflectors.

POWER SUPPLY

Plug-in 120V power supply.

ARM TECHNOLOGY AND MOVEMENT

31.5" parallel, three-pivot arm. Side-to-side and up-and-down head movement.


SENSORS

Split can also be delivered with an integrated PIR-sensor. The sensor turns the light on when motion is detected. The sensor also turns the light off after 15 minutes of inactivity.

Integrated 9/4 hour auto shut-off functionality.


Split

MEASUREMENT DRAWINGS

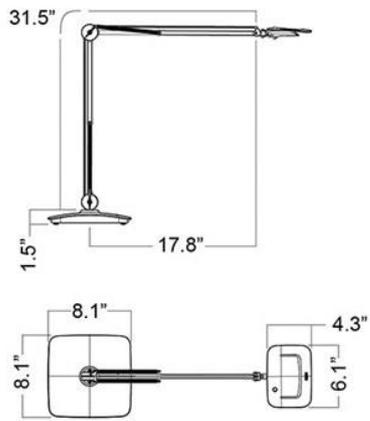

Split

LIGHT MEASUREMENT DRAWINGS

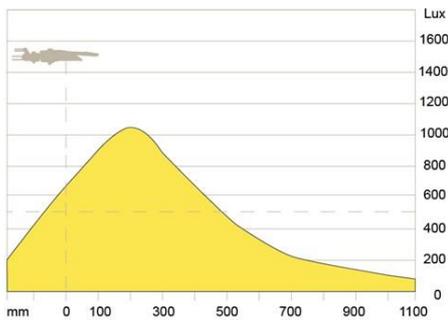

Split

GALLERY



Split



Split



Split



Split